

XIWEI hotel dining elevator adopts low-pit, inorganic room Hujingdao design, standard stainless steel car and appearance, convenient three-way calling function, fully meet the needs of related industries, XIWEI hotel delivery elevator production process.

The SolidWorks 3D model was established to ensure that every aspect of production is in place. The XIWEI hotel delivery elevator has been widely used in hospital canteens, school canteens, institutional canteens, KTV, bars, bars, cafes, Hong Kong style tea meals.

In different industries such as the hall, customers choose XIWEI hotel delivery elevator, we strive to create a time boutique.

Performance advantages of the Seward hotel dining elevator:

Xiwei Hotel Delivery Elevator uses the traditional traction drive mode, lifting floor restrictions are small, and ensure the accuracy of millimeter level.

The Xiwei Hotel Delivery Elevator adopts a powerful intelligent microcomputer control system to ensure a quick, accurate and reliable response to various instructions.

Sewei hotel dining elevator adopts reliable electrical configuration to ensure stable and durable operation.

The elevator of Xiwei Hotel adopt hairline stainless steel material to decorate the car and hall. It is corrosion-resistant, wear-resistant, clean, sanitary and beautiful.

Xiwei Hotel Delivery Elevator adopts flexible open-door, with the traditional elevator one-way open and through-door mode, at the same time, can meet the customer's demand for 90 degrees of right angle.

Sewei hotel dining elevator construction advantages:


The elevator of Xiwei Hotel adopts the design of low floor pit, which reduces the difficulty and cost of civil construction and ensures the integrity of the building.

The elevator of Xiwei Hotel is equipped with inorganic room. The control cabinet and drive system are integrated in the shaft. There is no need to set up the traditional super-computer room which covers a large area, requires high civil engineering and costs high, and affects the structure and appearance of the building.

Xiwei Hotel Delivery Elevator can provide domestic experience for many years of integrated steel structure shaft, external sealing quality double-sided sandwich color steel plate, users only need to provide space, you can enjoy a fast, rapid, safe and integrated window elevator and related services.

MACHINE ROOMLESS (MRL) FREIGHT ELEVATOR CONSTRUCTION LAYOUT DRAWING

无机房货梯土建示意图

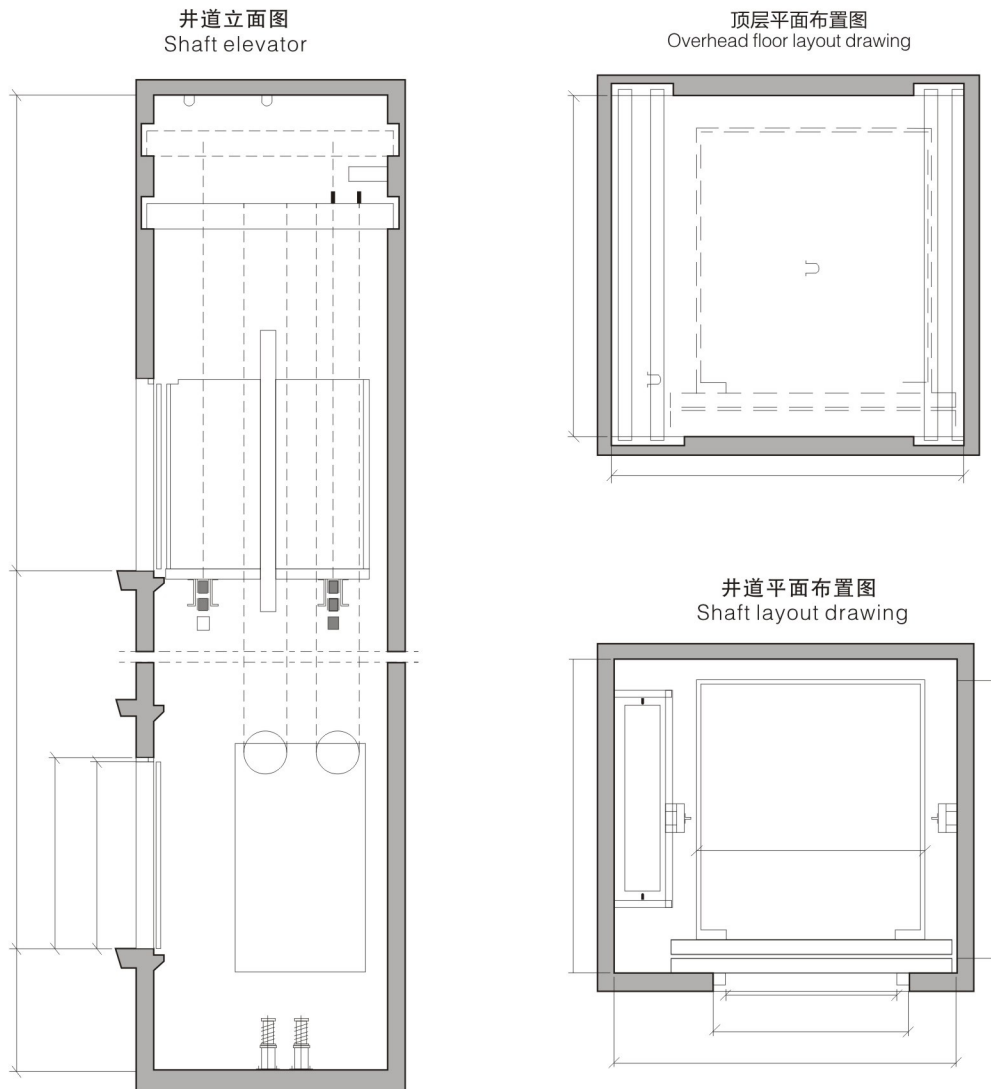

无机房货梯参数表 Machine roomless(MRL) freight elevator specifications

载重量 Load kg	速度 Speed m/s	开门方式 Door Open type	净开门 Net door opening (宽 x 高) (JJ x HH) mm	轿厢外尺寸 Car Size (宽 x 深) (AA x BB) mm	井道净尺寸 mm Shaft Net Size		
					(宽 x 深) (AH x BH)	底坑 深度 PIT	顶层 高度 OH
1000	0.5	双折旁开 Two Panel Side Opening	1200 x 2100	1500 x 1800	2250 x 2200	1600	4500
2000	0.5	双折旁开 Two Panel Side Opening	1500 x 2100	2000 x 2300	3150 x 2660	1600	4800
3000	0.5	中分双折 Four panel center opening	2000 x 2100	2470 x 2560	3750 x 2900	1600	4900
5000	0.5	中分双折 Four panel center opening	2400 x 2400	2800 x 3400	4250 x 3800	1600	5100

注：上述尺寸供设计参考，具体尺寸以合同签约时提供的土建图为准。
Note: Only for reference, final manufacture please follow contract.